



257X

UNCOATED, CUT LEVEL F GLOVE

Uncoated spandex liner reinforced with stainless steel and aramid.

FEATURES

- › Cut resistant: Level F (EN 388:2016)
- › 13 gauge plaited-knit spandex liner with aramid & stainless steel
- › Contact heat level 1
- › Exceptional cut resistant performance due to superior blend of aramid and stainless steel
- › Seamless, plated-knit liner avoids scratchy fibres touching the skin, ensuring comfort for long lasting wear
- › Excellent dexterity thanks to flexible properties of spandex
- › Lightweight, breathable liner that reduces sweat and keeps hands dry
- › An ideal inner glove for extra cut protection
- › Ambidextrous and launderable for multiple use, less waste and cost reduction



SUITABLE FOR

Typical Industries

- Automotive
- Glass
- Manufacturing
- Mechanical

Suitable Applications

- Intricate parts handling
- Glass and window handling
- Dry & oily parts assembly
- Mechanical and engineering
- Mounting & dismantling

CERTIFICATION

CAT II	EN 388:2016	EN 407:2004
	2X42F	X1XXXX

See overleaf for explanation





257X

SUITABLE FOR

MATERIALS	LINER:	Aramid knit, spandex, stainless steel
	COATING:	Uncoated
COLOUR	Black/Yellow	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Knitwrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/S	SHO257X1	12 pairs per bag 72 pairs per case
7/M	SHO257X2	
8/L	SHO257X3	
9/XL	SHO257X4	
10/XXL	SHO257X5	


RECOMMENDATIONS FOR USE

- Do not use where there are chemical, electrical, thermal (more than 100°C) or entanglement risks.
- Wash at 40°C max.
- Performance levels as per standard EN388 retained after 3 washes, subject to variations linked to actual usage conditions.
- The performance levels apply to the coated surface only. Store in a dry place, away from the light.

CERTIFICATION LEGENDS




MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

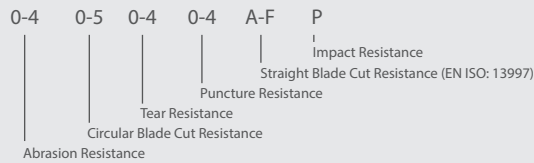

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE EN 407 PERFORMANCE LEVELS

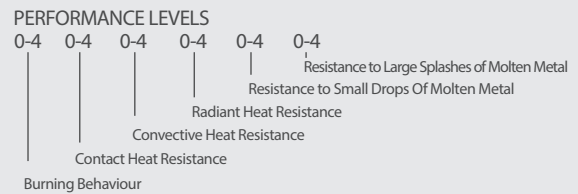

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

